




Noncombustible material must be 230mm above fireplace top and extend 230mm past sides


Must use Decromesh & flue shield OR single active flue and double 180 ° rear flue shield for first 900mm

Noncombustible continuous material With 12mm air gap to hearth level

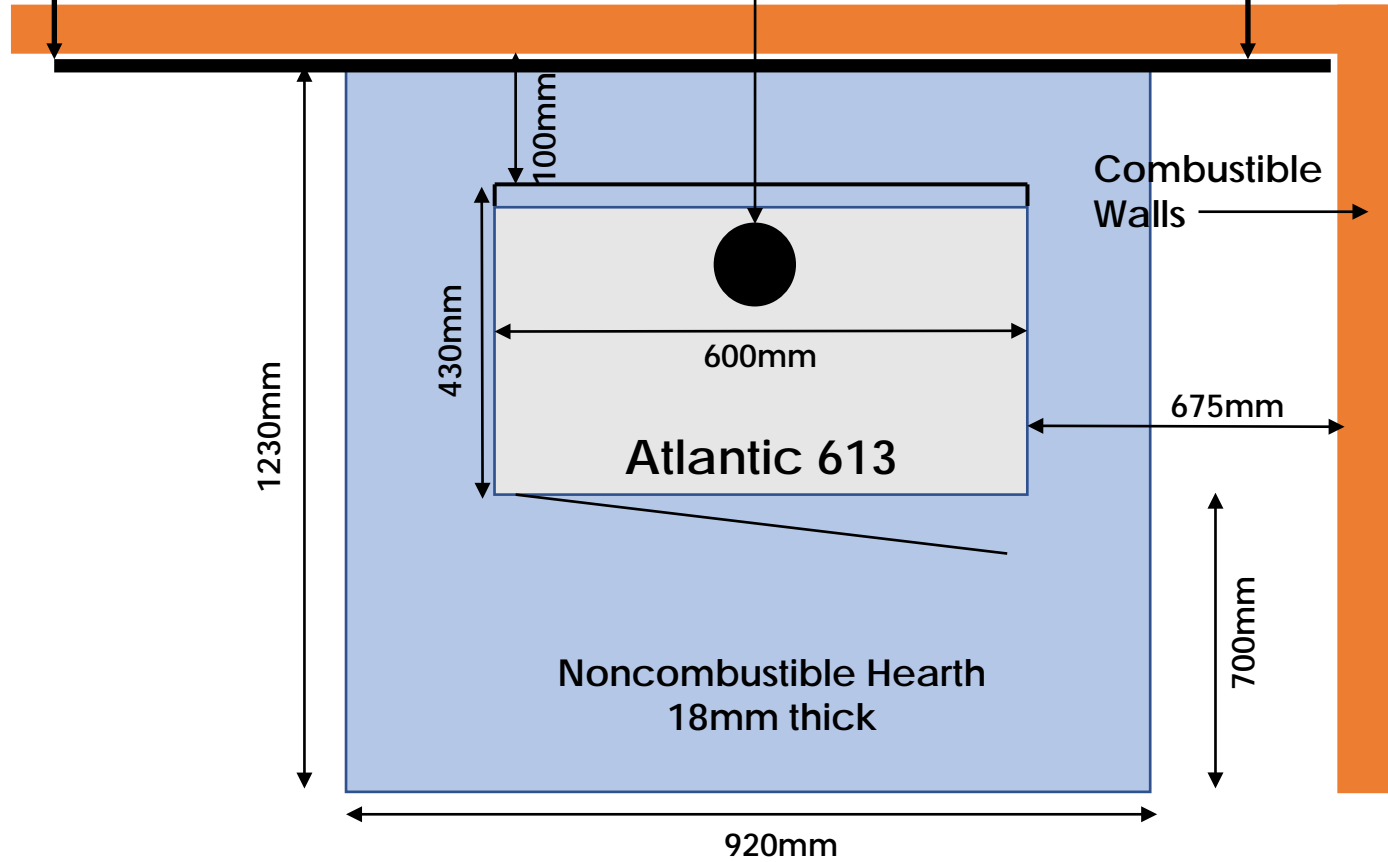

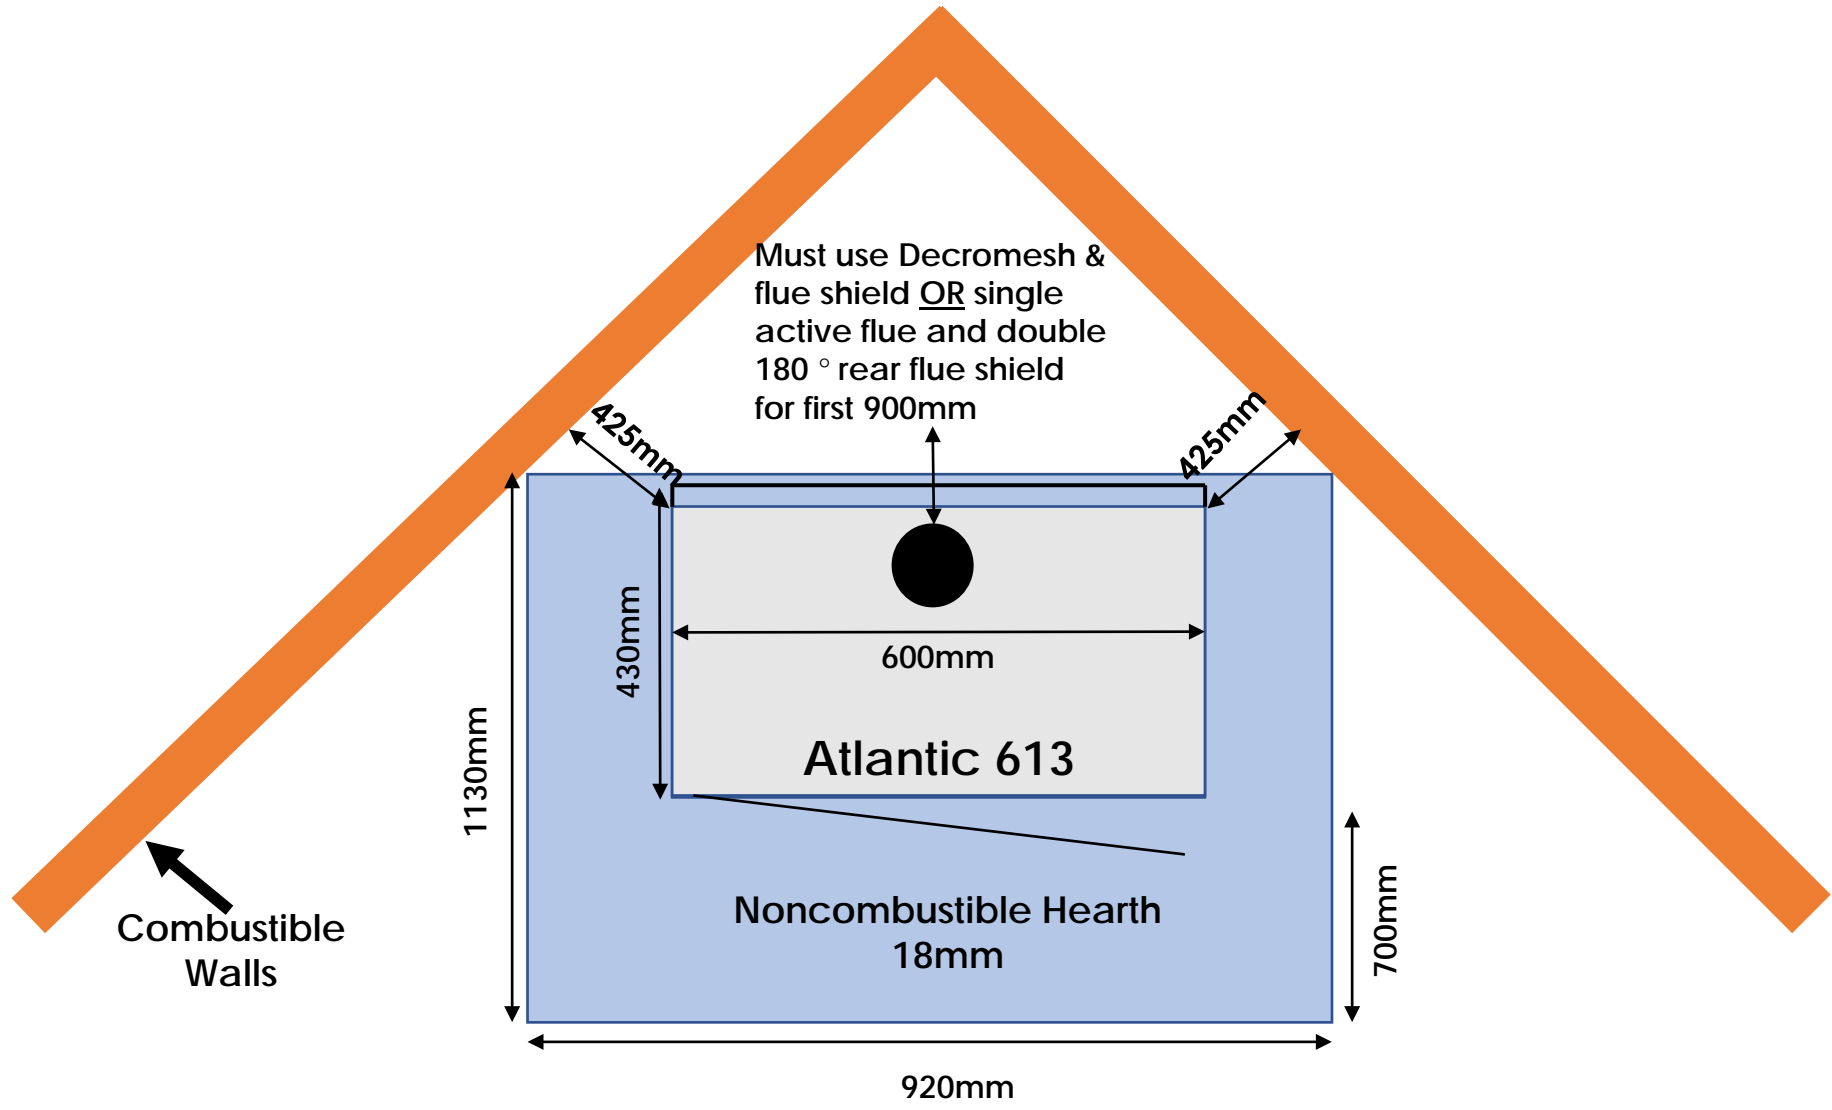

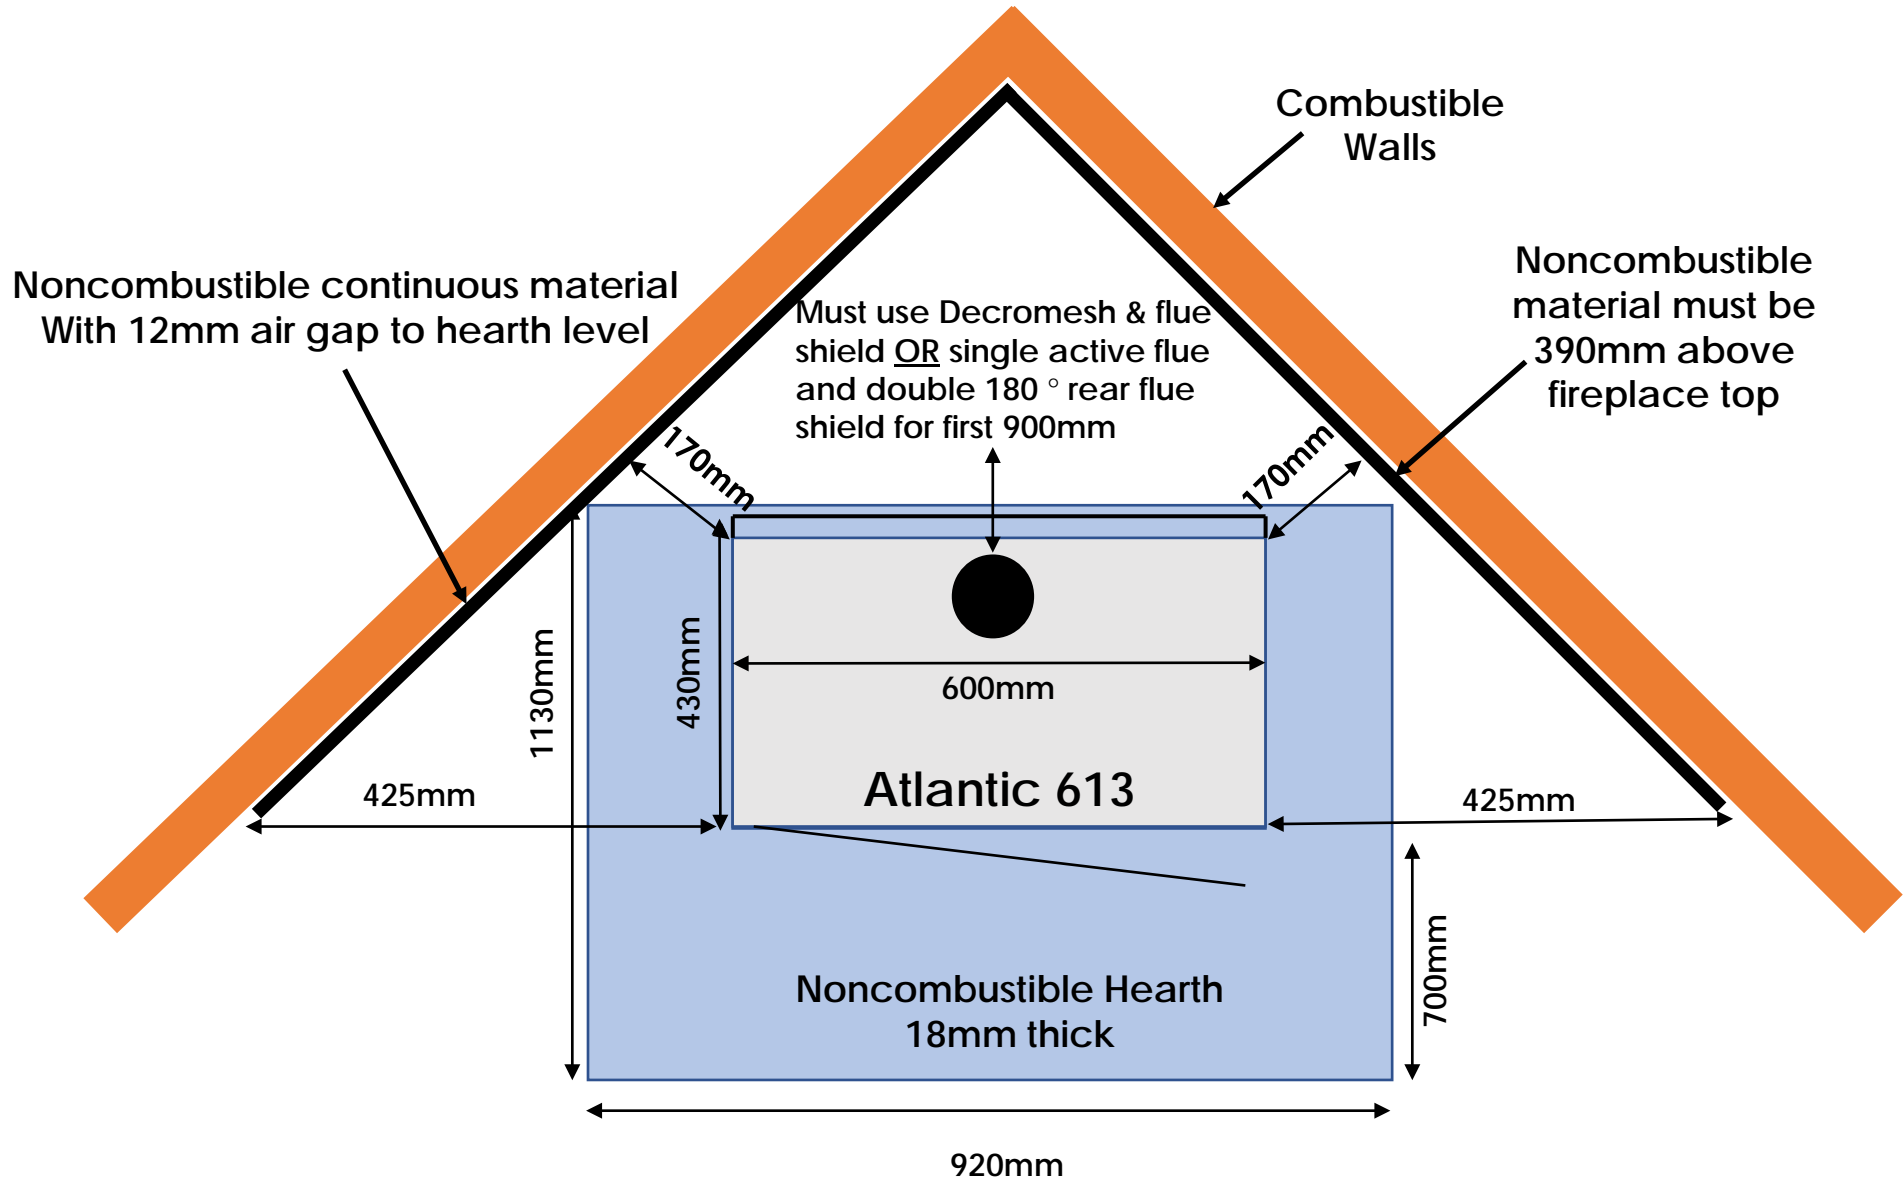


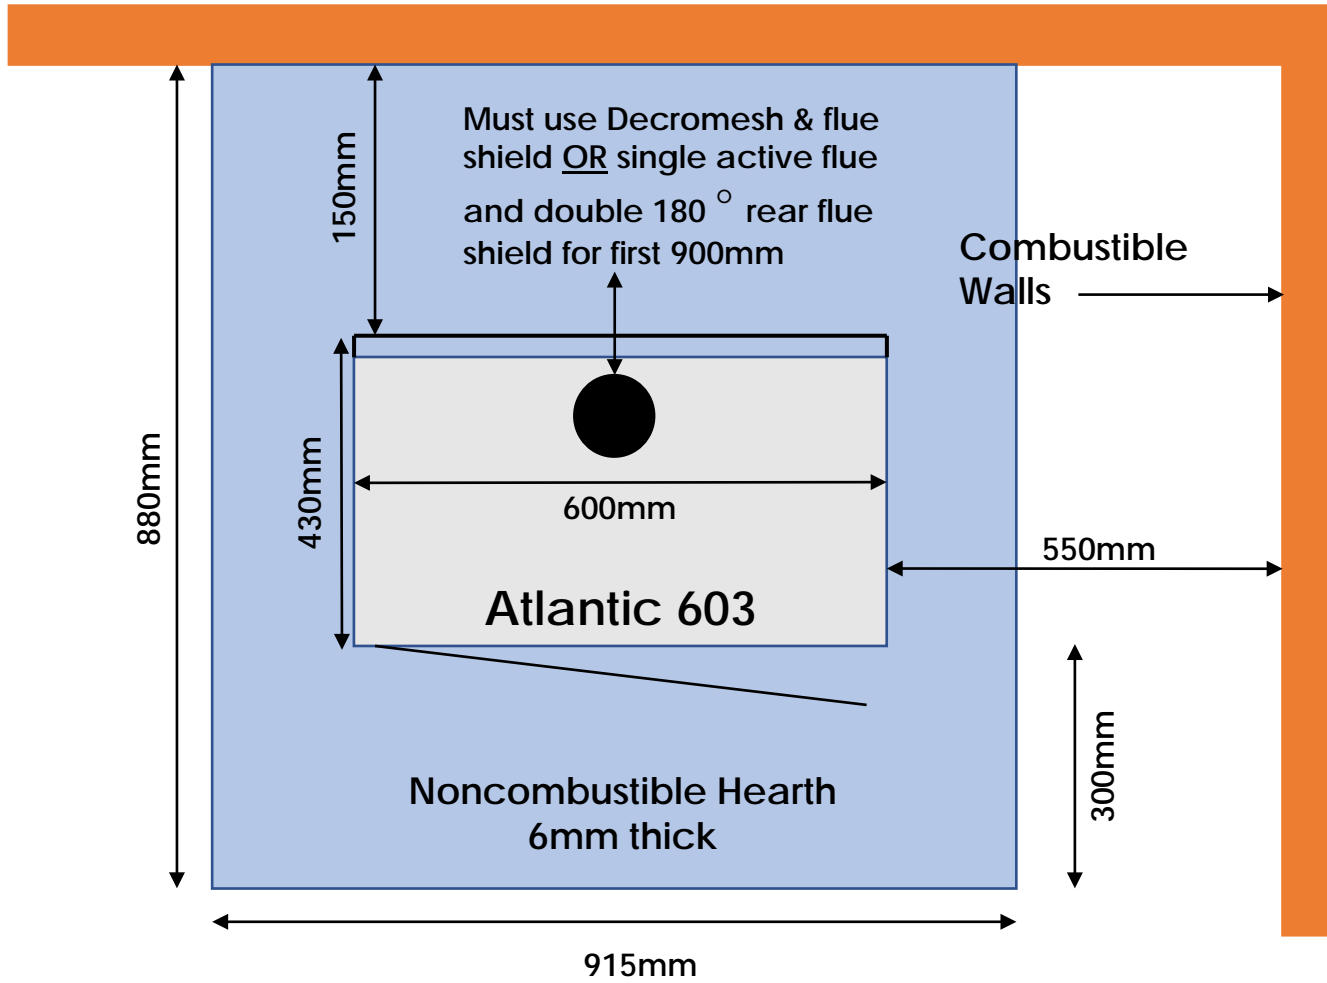

Noncombustible material must be 140mm above fireplace top and extend 140mm past sides

Must use Decromesh & flue shield OR single active flue shield and double 180° rear flue shield for first 900mm

Noncombustible continuous material With 12mm air gap to hearth level

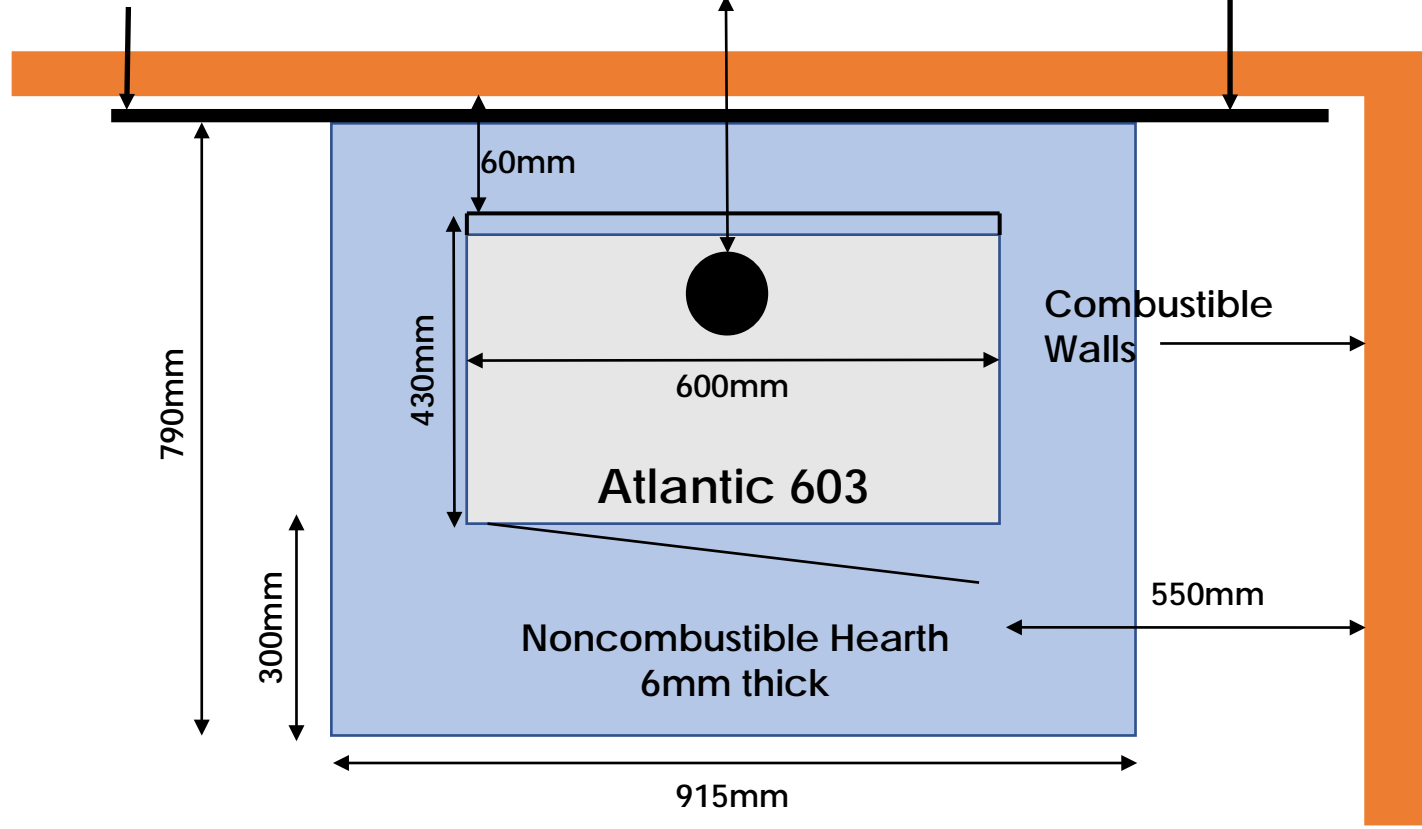

790mm

300mm

430mm

60mm

600mm


Atlantic 603

Noncombustible Hearth
6mm thick

915mm

Combustible
Walls

550mm

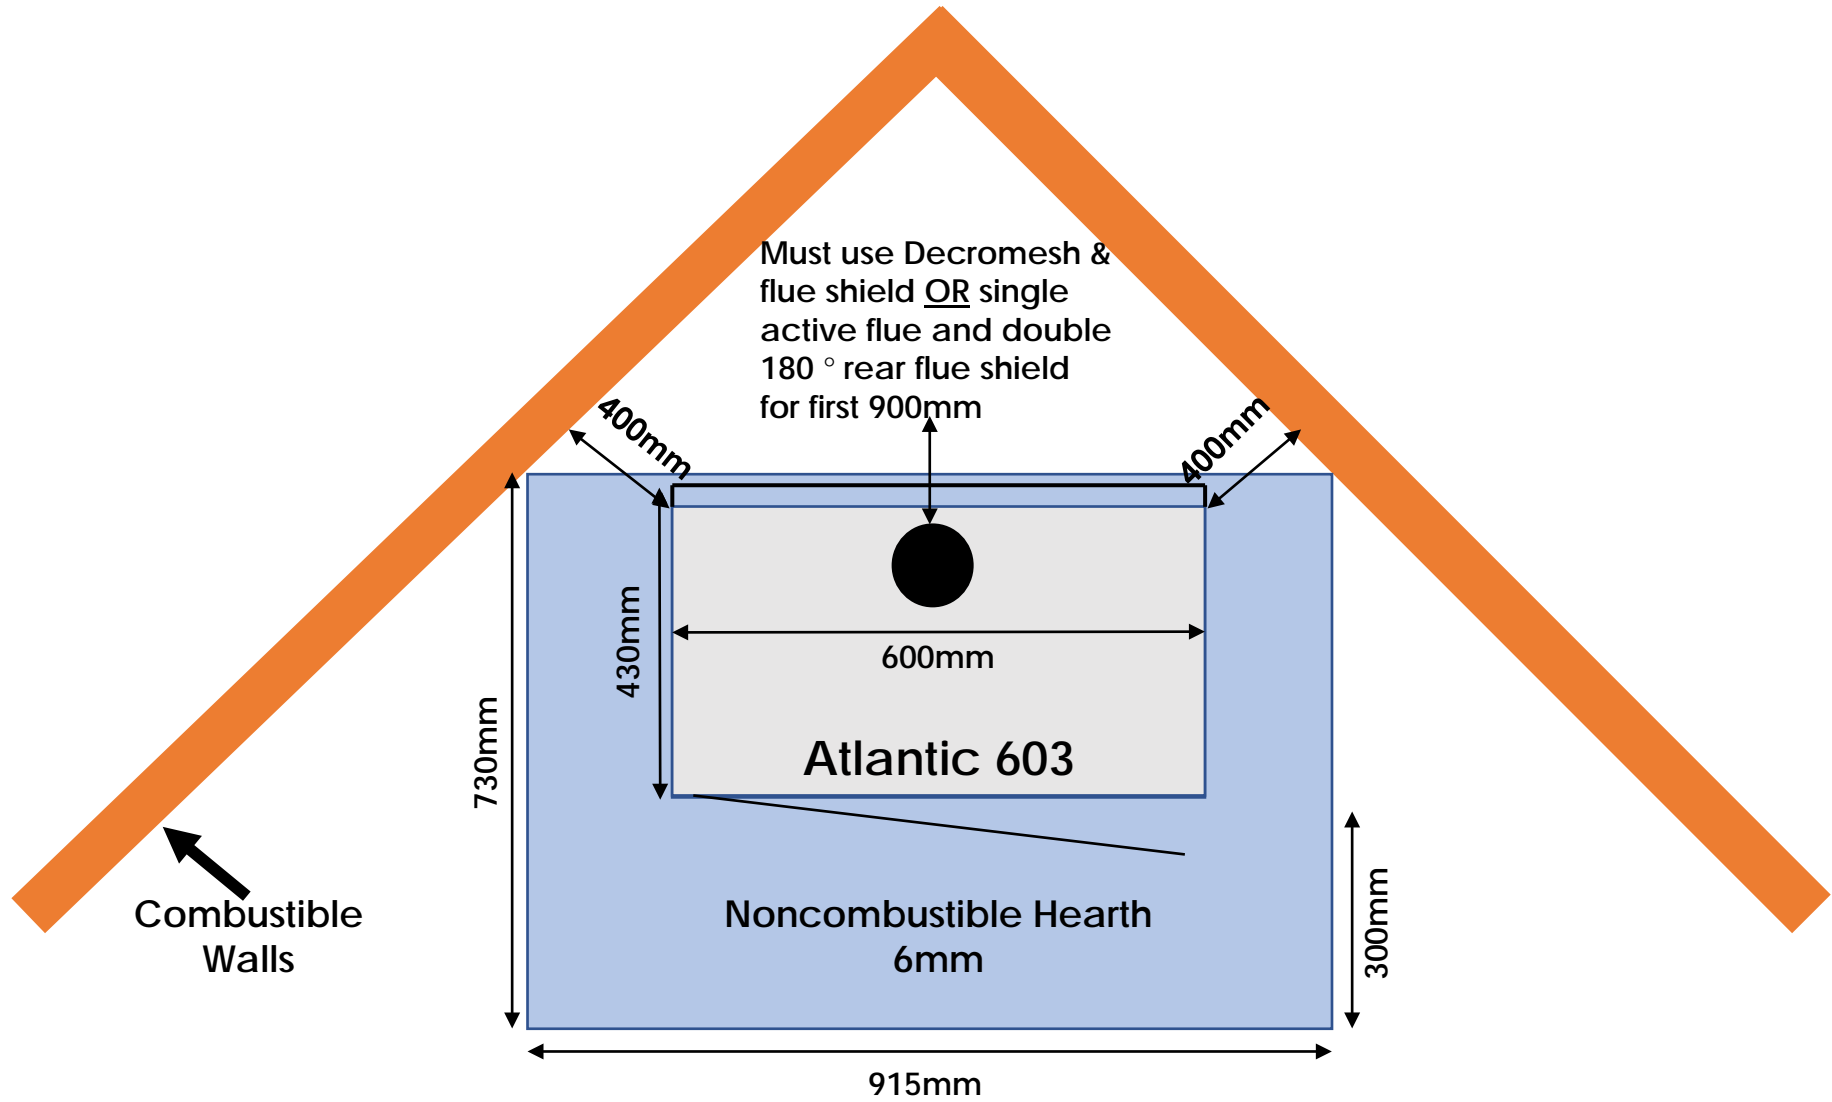


Must use Decromesh & flue shield OR single active flue and double 180 ° rear flue shield for first 900mm

Combustible Walls


Atlantic 603

Noncombustible Hearth
6mm

400mm
400mm
730mm
430mm
600mm
915mm
300mm

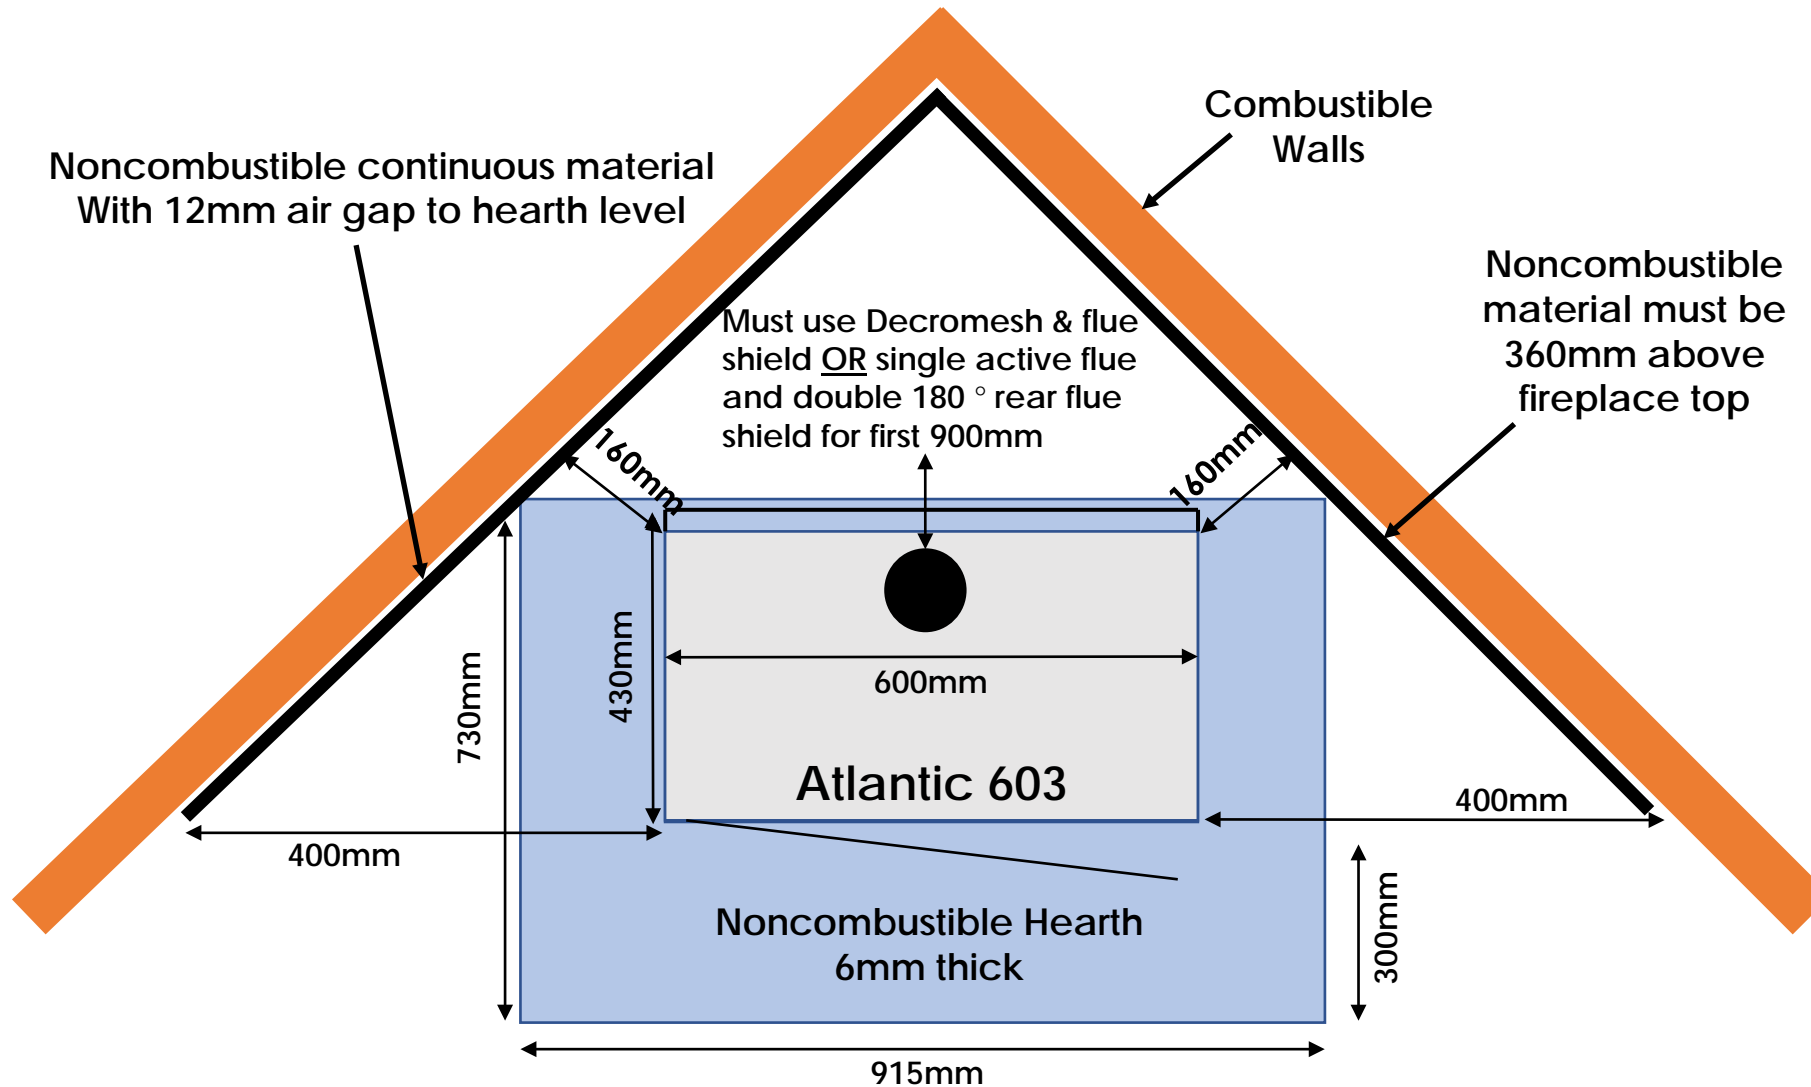


Fireplace base min
300mm off the ground

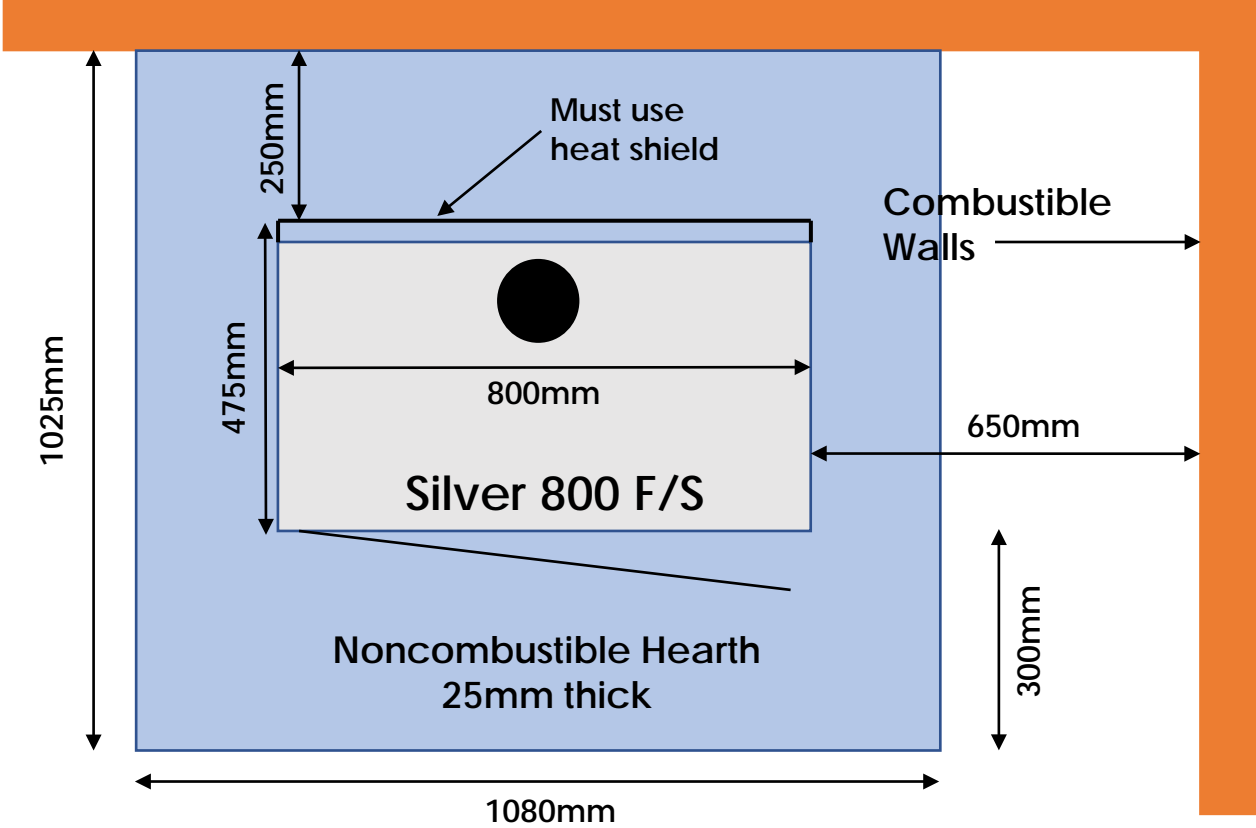


Noncombustible material
must be 230mm above
fireplace top and extend
230mm past sides


Noncombustible
continuous material
With 12mm air gap to
hearth level

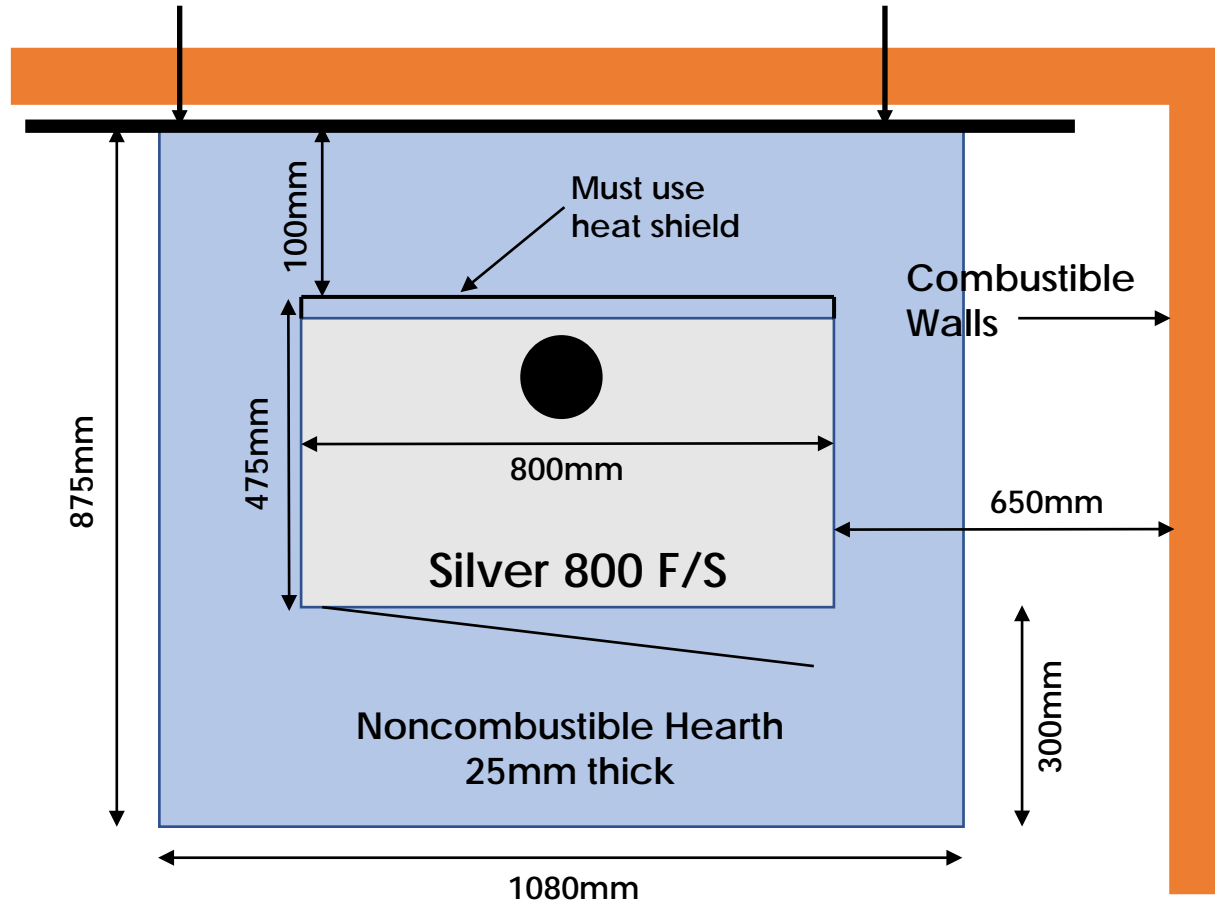

Fireplace base min
300mm off the ground

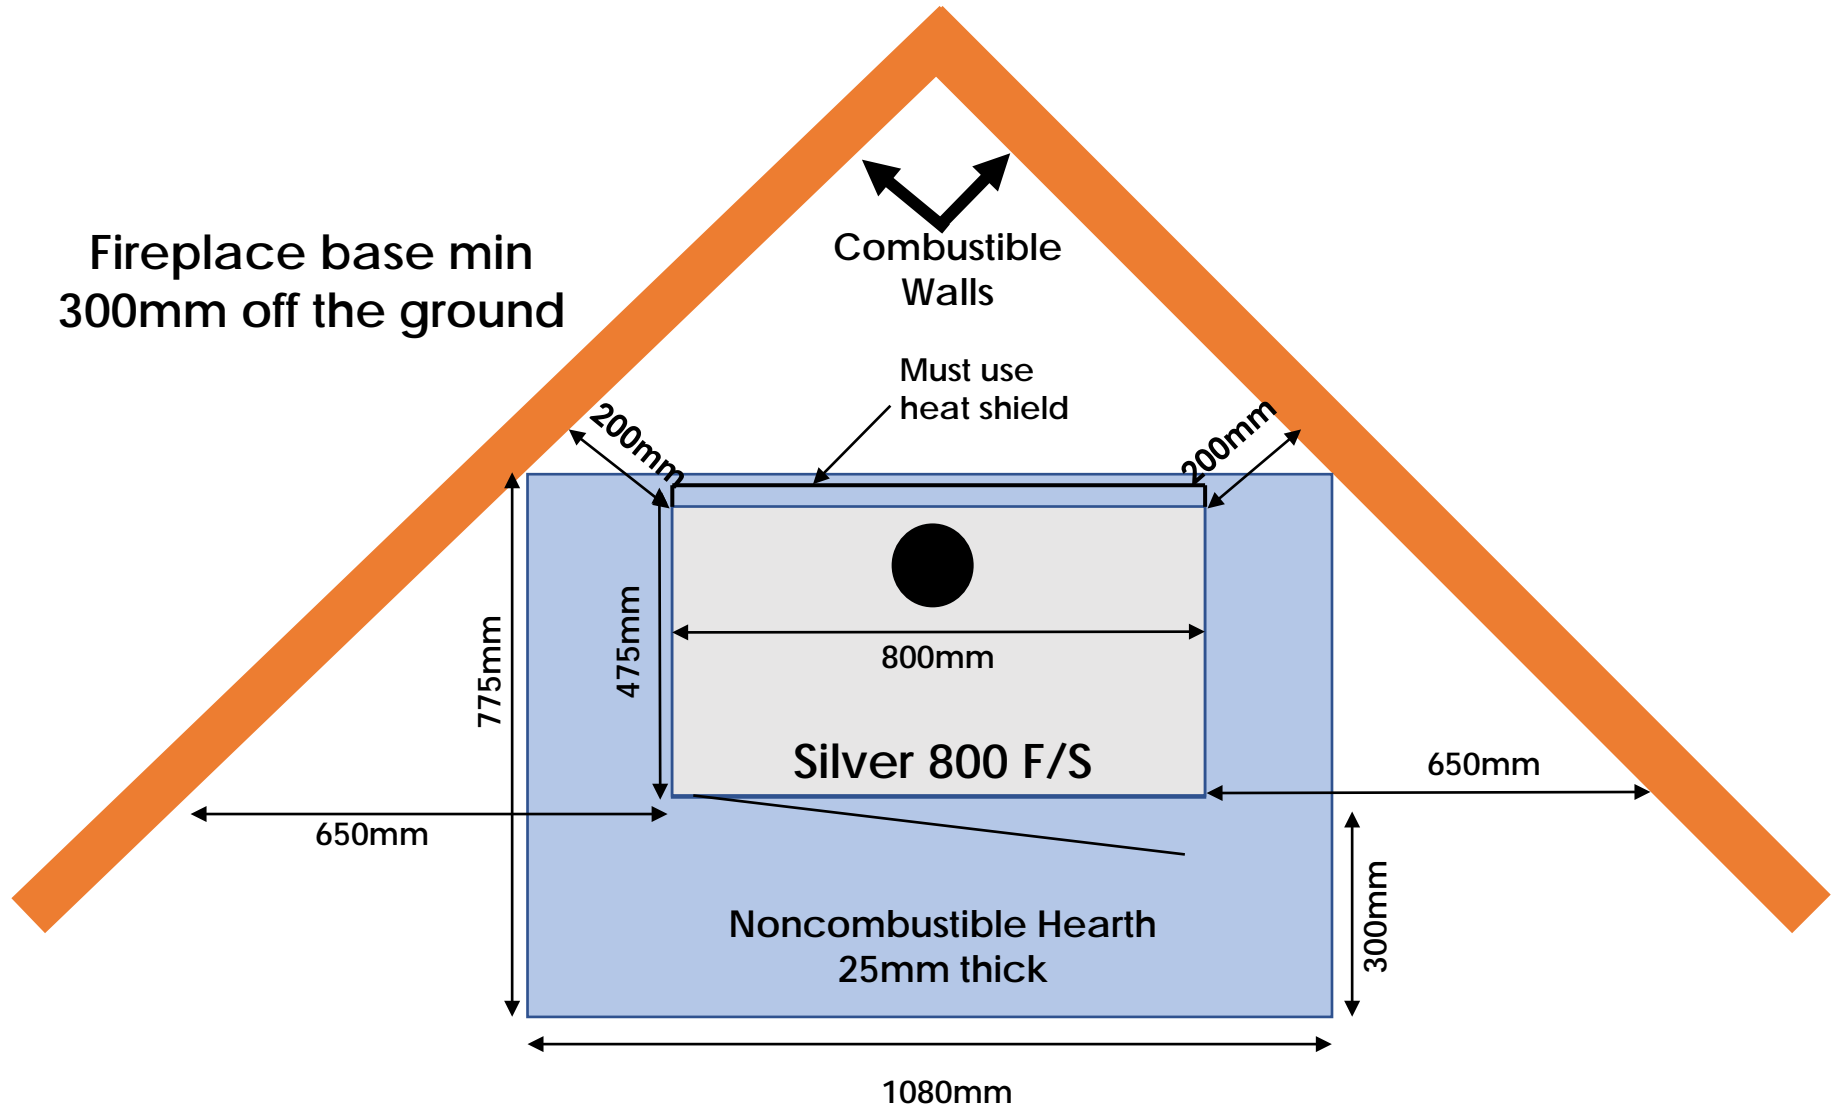


Fireplace base min
300mm off the ground

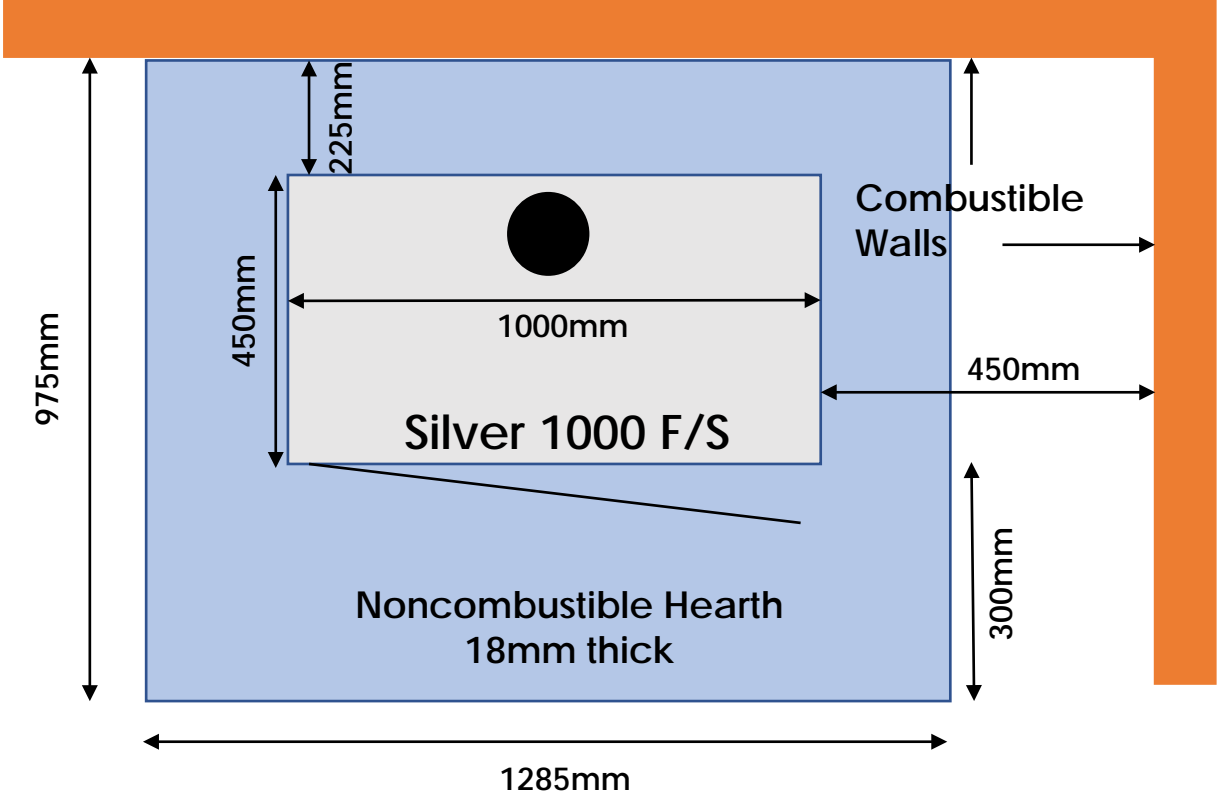


Noncombustible material
must be 210mm above
fireplace top and extend
210mm past sides

Noncombustible
continuous material
With 12mm air gap to
hearth level

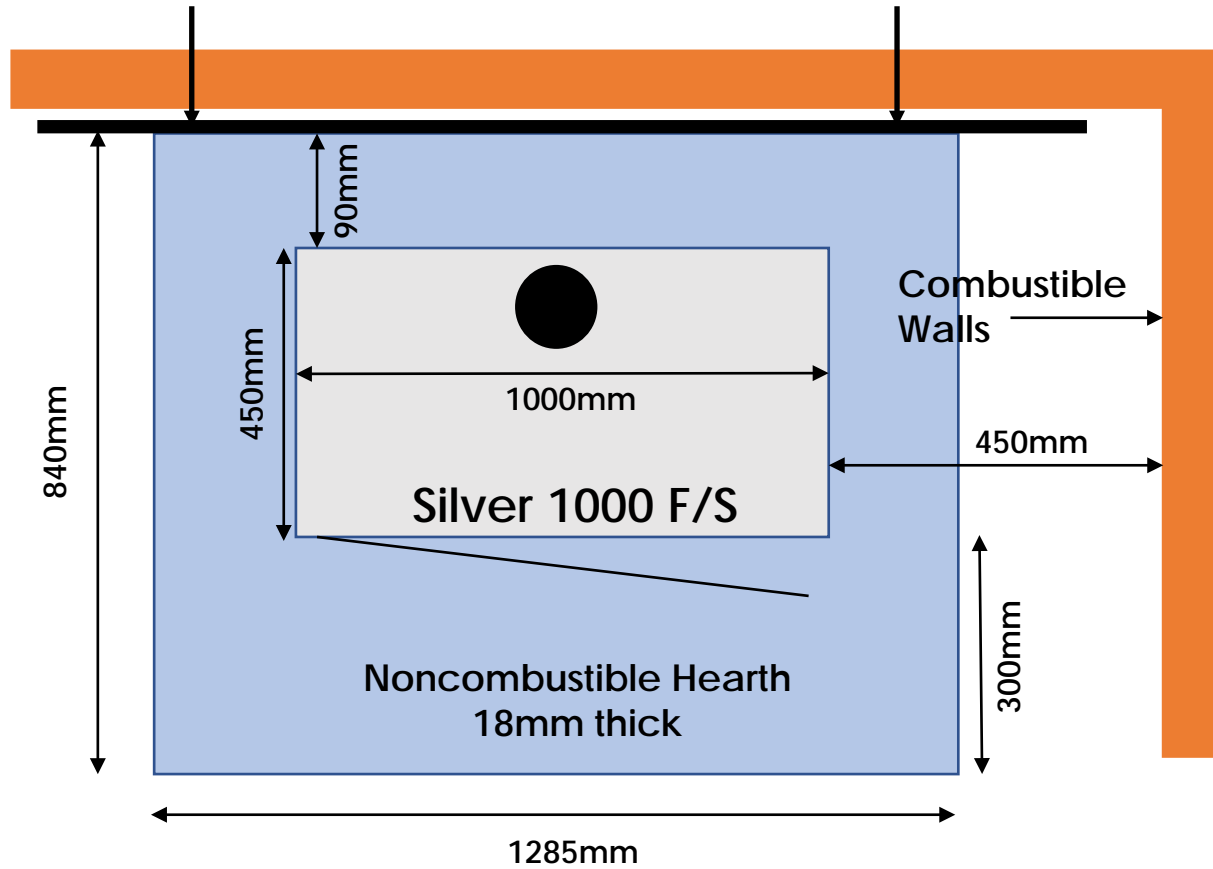

Fireplace base min
300mm off the ground

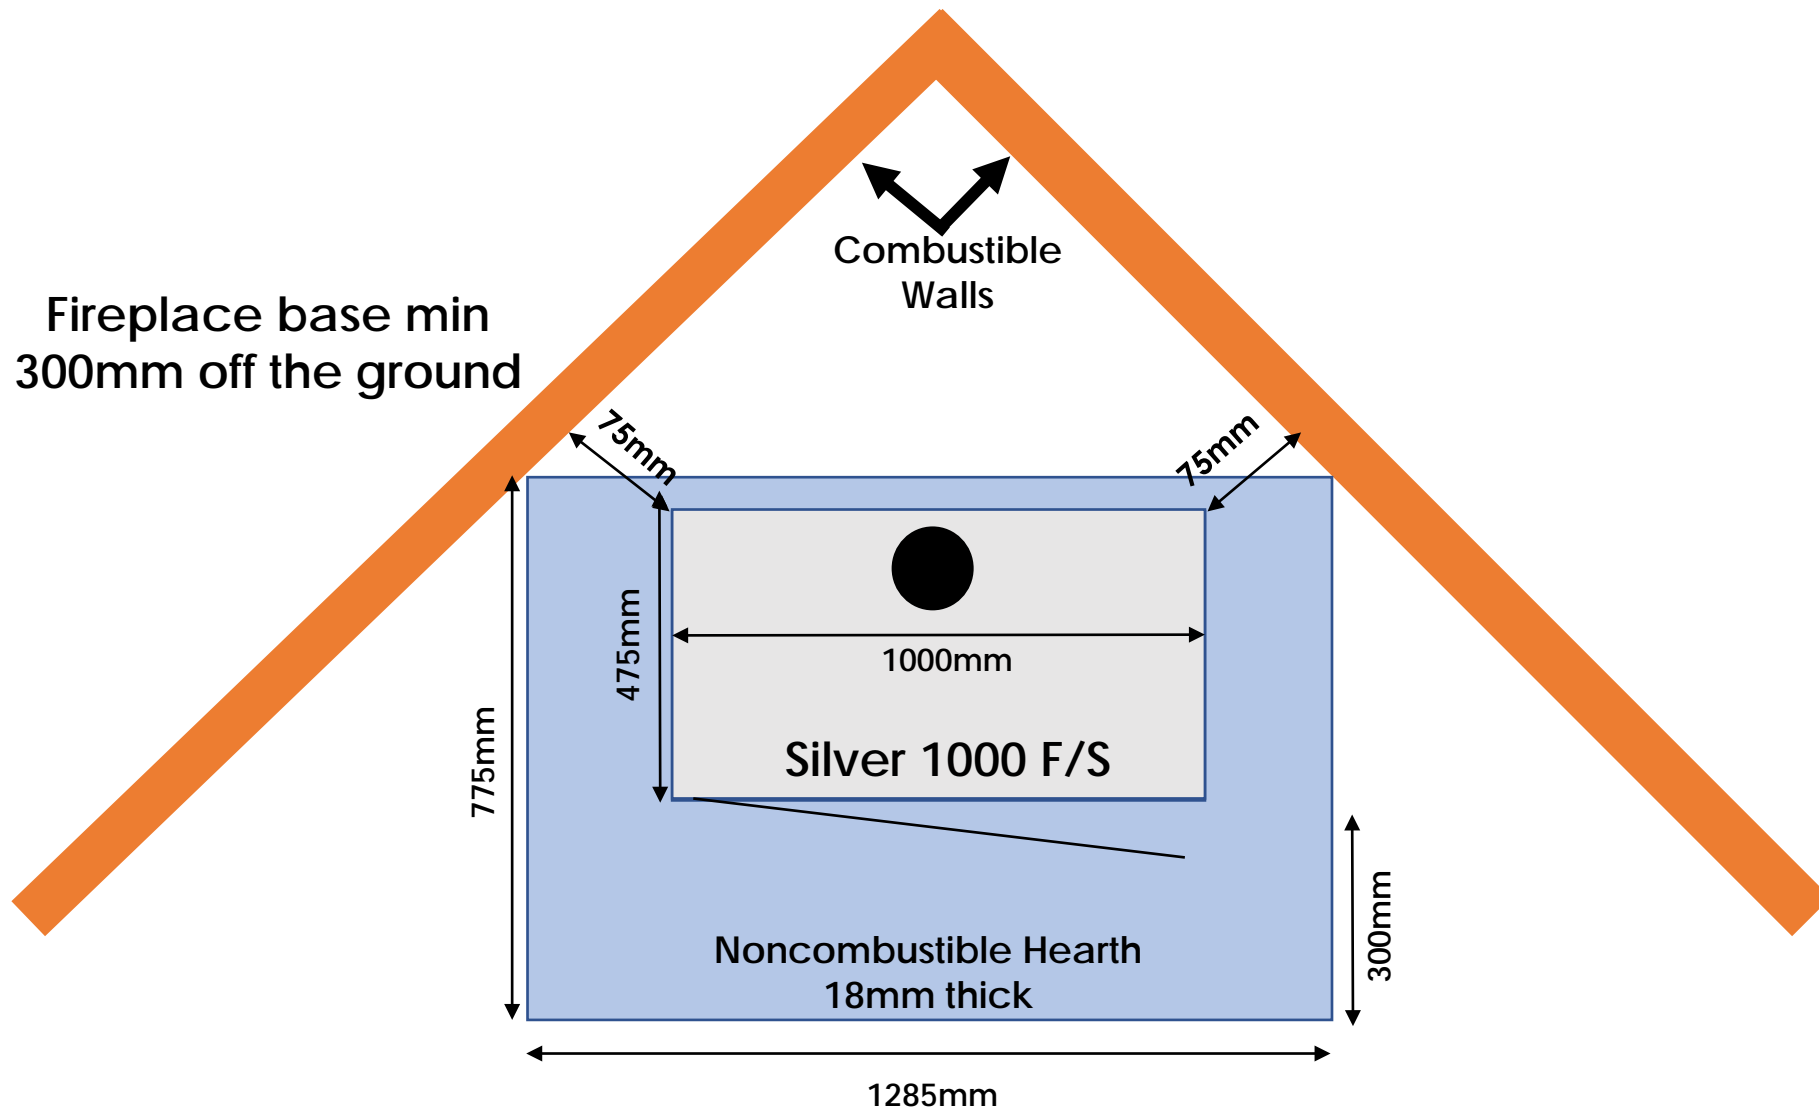

Fireplace base min
300mm off the ground

Combustible
Walls

75mm

75mm

775mm

475mm

1000mm

Silver 1000 F/S

Noncombustible Hearth
18mm thick

300mm

1285mm

Fireplace base min
300mm off the ground

